



<b>CVC5100BPVF</b>	2.8 - 12mm auto iris varifocal lens, grey housing
<b>CVC5100BPVFW</b>	2.8 - 12mm auto iris varifocal lens, white housing
<b>CVC5200BPVF</b>	5 - 50mm auto iris varifocal lens, grey housing
<b>CVC5200BPVFW</b>	5 - 50mm auto iris varifocal lens, white housing




**Features**

- 1/3" Sony Super-Had II™ CCD
- 24 IR LEDs & 6 White LEDs
- 600 TV lines resolution
- Digital image stabilization
- 12VDC / 24VAC dual voltage operation
- Day & Night
- 5 year warranty

**Specifications**

Image Sensor .....	1/3" Sony Super-HAD II™ CCD
Resolution.....	600 TV lines
Minimum Illumination.....	CDS off: 0.15 lux CDS on: 0.00002 lux
IR Range .....	Up To 65'
White Balance .....	ATW / Outdoor / Indoor / Manual AWC (1,700°K - 11,000°K)
Gain Control .....	High / Low / Off
Backlight Compensation .....	BLC / HLC / Off
S/N Ratio .....	More than 52dB
Video Output.....	CVBS: 1.0Vp-p / 75 Ohm
Effective Pixels .....	811 (H) x 508 (V) 768 (H) x 494 (V)
Electronic Shutter Speed.....	1/60 sec. - 1/120,000 sec.
Sharpness .....	On / Off (level adjustable)
Privacy Masking .....	On / Off (12 programmable zones)
Scanning Frequency.....	15.734kHz (H) & 59.94Hz (V)
Scanning System.....	2:1 interlace
Synchronization .....	Internal
TV System.....	NTSC, PAL
Day & Night .....	Color / BW / Auto
Sense-Up.....	Auto / Off (selectable x2 - x512)
Motion Detection.....	On / Off (8 programmable zones)
Digital Zoom .....	On / Off (1x - 16x)

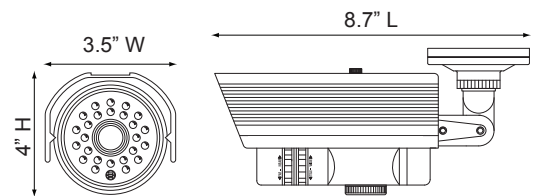

DIS.....	On / Off
Flip/Mirror .....	On / Off
SSDR.....	On / Off (level adjustable)
SSNR III (Digital Noise Reduction)....	On / Off (level adjustable)
Power Consumption .....	12VDC, 250mA (CDS off, PIR off) 600mA (CDS on, PIR on) Heater on adj: 200 - 600mA 24VAC 100mA (CDS off, PIR off), 250mA (CDS on, PIR on) Heater on adj: 120 - 250mA
Power Supply .....	12VDC / 24VAC (dual voltage) (power supply not included)
Operating Temperature/	
Humidity.....	14° F - 122° F / RH 95% Max.
Storage Temperature/	
Humidity.....	-4° F - 140° F / RH 95% Max.
Dimensions.....	3.5" (W) x 4" (H) x 8.7" (L)
Weight .....	3.5 lbs.

**Optional Accessories**



CVCJBB  
Bullet Camera  
Junction Box



INTJBS  
Square Junction Box



INTCM  
Corner/Pole Adaptor



PSW4  
Power Supply



PSW5  
Power Supply

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 1/24/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880

[www.specotech.com](http://www.specotech.com)