


CVC5735DNV	4 - 9mm auto iris varifocal lens
CVC5735DNVW	White housing
CVC5835DNV	2.8 - 12mm auto iris varifocal lens
CVC5835DNVW	White housing
CVC5935DNV	9 - 22mm auto iris varifocal lens
CVC5935DNVW	White housing

Features

- 1/3" Sony Super-HAD II™ CCD
- 3D-DNR (Sense-up) - sharp image under ultra low light level
- Intense-IR Function - no saturation image, vivid image
- Defect Function - elimination of white spots
- HSBLC (High Light Suppression BLC)
- Privacy zone
- Third-Generation DSP chip
- ICR - removable IR cut filter
- Convenient On-Screen Display (OSD) function controls
- 12VDC / 24VAC dual voltage operation
- IP66 compliant
- 5 year warranty


Specifications

Image Sensor	1/3" Sony Super-HAD II™ CCD
Resolution.....	600 TV lines
Minimum Illumination.....	0.000006 lux (IR LEDs on)
Effective Pixels	768 (H) x 494 (V)
Total Pixels	811 (H) x 508 (V)
Number of IR LEDs	33
IR Range	Up To 65'
White Balance	ATW / AWB / Manual / AWC - Set
Gain Control	High / Middle / Low / Off
S/N Ratio	52dB (AGC off, weight on)
Backlight Compensation.....	BLC / HSBLC / Off
Electronic Shutter Speed.....	Auto (1/50, 1/60 sec. - 1/100,000 sec.)
OSD.....	Built-In
3 DNR.....	On / Off (0 - 100 levels adjustable)
D-WDR.....	Indoor / Outdoor / Off
Sharpness	0-31' (level adjustable)
Privacy.....	On / Off (8 zones)
Scanning System.....	2:1 interlace
Synchronization.....	Internal / Line - Lock
Motion Detection.....	On / Off (4 zones)
Sense-Up.....	Off / Auto (selectable limit x2 - x256)
Mirror	Off / Mirror / V-Rev / Rotate



Freeze	On / Off
Day & Night	Color / BW / Auto / EXT
Digital Zoom	On (32x) / Off
Blemish Compensation.....	Auto: 128 point / Manual: 4 point
Power Supply	12VDC / 24VAC (dual voltage) (power supply not included)
Power Consumption	12VDC, 250mA (CDS off) 12VDC, 700mA (CDS on) 24VAC, 100mA (CDS off) 24VAC, 250mA (CDS on)
Operating Temperature/ Humidity.....	14° F - 122° F, RH 95% max.
Storage Temperature/ Humidity.....	-4° F - 140° F, RH 95% max.
Dimensions.....	4" (H) x 5.5" (W)
Weight	1.2 lbs.

Optional Accessories

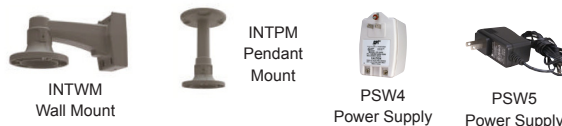

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 2/1/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com